



Aislante / Isolant / Insulation: Poliuretano / Polyuréthane / Polyurethane

Exterior / Extérieur / External: Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

Interior / Intérieure / Internal: Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

Espesor / Épaisseurs / Thickness(mm):	120	150	180	200
K W/m²K:	0,192	0,153	0,128	0,115
K Kc/m²°C:	0,165	0,132	0,110	0,099
R m²K/W:	5,217	6,522	7,826	0,023




Italpannelli se reserva el derecho a modificar el diseño y características de los paneles sin previo aviso.

Italpannelli se réserve le droit de modifier la conception et les caractéristiques des panneaux sans préavis.

Italpannelli reserves the right to modify the design and characteristics of the panels without prior notice.



ABACO DE PÉRDIDAS TÉRMICAS
 ABACO PERTE CHALEUR
 ABACO HEAT LOSS

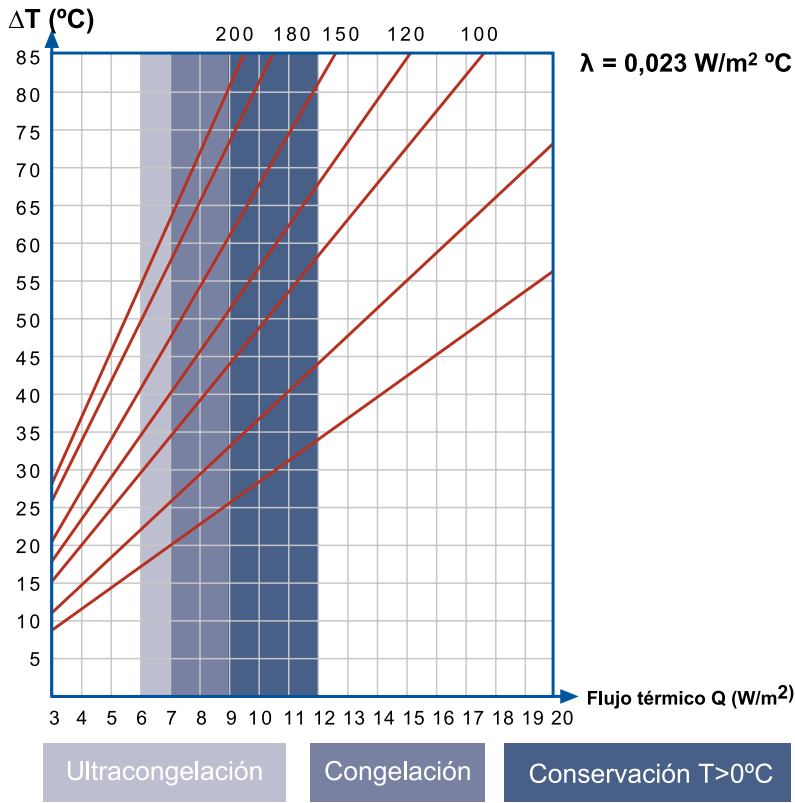

ESQUEMA ESTÁTICO 2 apoyos - Distancia entre apoyos: cm.
 SCHÉMA STATIC 2 supports - Distance entre les supports: cm.
 STATIC SCHEME 2 supports- Distance between supports: cm.

120	784	679	585	518	465	422	385	355	272	297	252	226	142
140	917	784	684	606	544	493	451	415	328	348	296	265	197
150	983	841	734	650	584	529	484	446	385	374	318	284	228
180	1182	1011	882	783	703	637	583	537	413	451	383	343	283
200	1315	1124	982	871	782	709	649	598	497	502	427	382	316

ESQUEMA ESTÁTICO +3 apoyos - Distancia entre apoyos: cm.
 SCHÉMA STATIC +3 supports - Distance entre les supports: cm.
 STATIC SCHEME +3 supports- Distance between supports: cm.

Espesor del panel (mm)	150	175	200	225	250	275	300	325	350	375	450	500	600
120	784	679	585	518	465	422	385	355	272	297	252	226	142
140	917	784	684	606	544	493	451	415	328	348	296	265	197
150	983	841	734	650	584	529	484	446	385	374	318	284	228
180	1182	1011	882	783	703	637	583	537	413	451	383	343	283
200	1315	1124	982	871	782	709	649	598	497	502	427	382	316

ficha2